



measurement

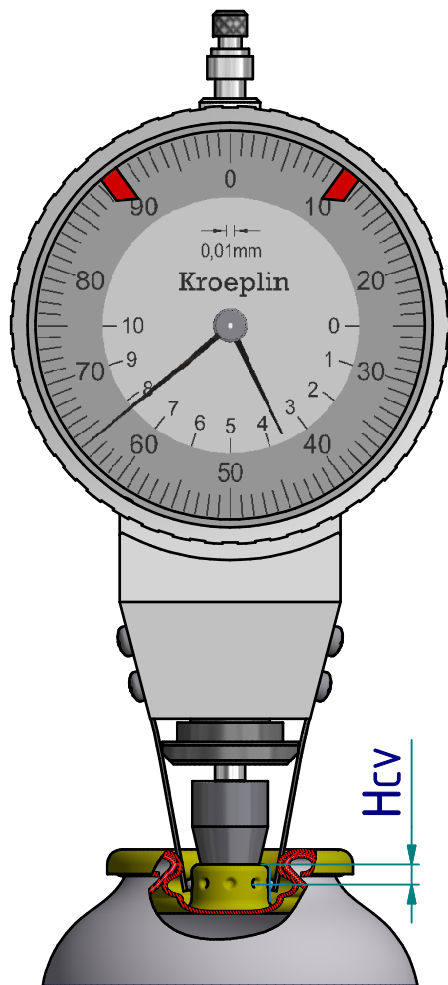


calibration

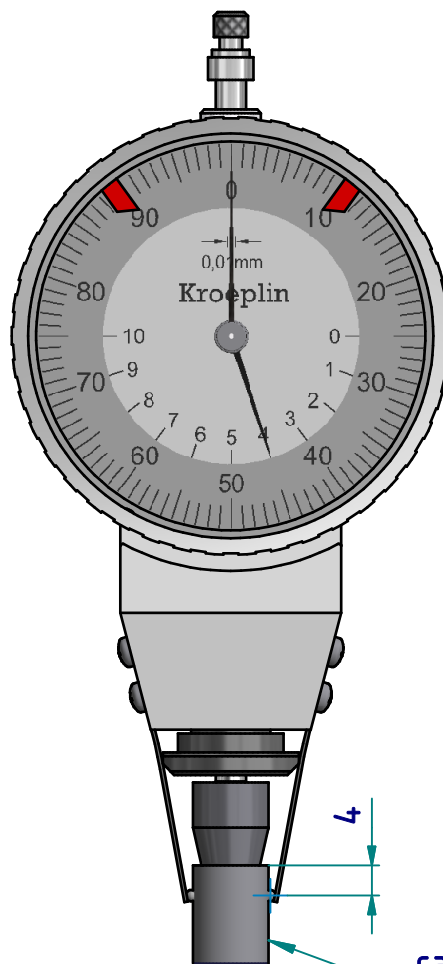

calibratearbor
(included in delivery)

as-delivered condition

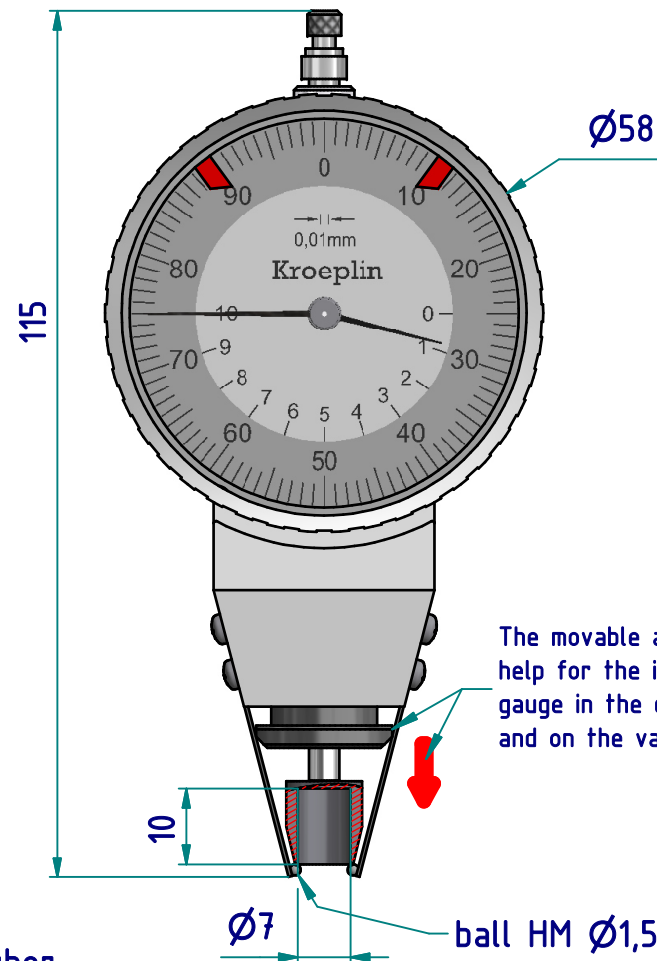

The movable apart compression help for the insertion of the gauge in the calibration arbor and on the valve plants.

subject to technical alterations

type: aerosol
range: 2,5 - 8 mm
range of indication:
digital step:
scale interval: 0,01 mm
measuring force: 0,7 - 1,3 N
weight: ca. 200 g

acceptable deviations
VDI/VDE/DGQ 2618 Bl. 12.1/13.1)
max. permissible errors "G": 0,02 mm
repeatability "r": 0,01 mm
reference temperature: 20° C
operation temperature: 10° C - 30° C
storage temperature: -10° C - 50° C

scale: 1:1
drawing-nr.: IDW-A1180-DB_e
date of issue: 24.11.2010
name: J.Heuser
revision status: 2123 / MHe
revision date: 18.09.2015